DCLT series



| Features | -

• High temperature tolerance(-25~85°C) and highly reliable

| Applications | -


• Memory back-up for Video, Audio, Cameras, Camcorder, Telephones, Printer, Car stereo, Computer, Notebook PC, Rice cooker, PLC, Set top box, Washing machine, DVD-RW, Home network etc.



| Specifications | -

Items	Characteristics			
Rated working voltage	5.5VDC			
Operating temperature	-25 to +85°C			
Nominal Cap. range	0.47 to 1.0F			
Capacitance tolerance	-20% to +80%(at 25℃)			
Low temperature(-25°C) characteristics	Capacitance change : \leq 50% of the initial value at +25°C Internal resistance : Less than five times of the initial value at +25°C			
Endurance	After 1,000hours application of rated DC working voltage at +85°C, the capacitor shall meet the following limits. • Capacitance change: ±30% of the initial value • Internal resistance: Less than four times of the initial value			
Shelf life	After 1,000hours storage at +85°C without load, the capacitor shall meet the specified limit for "Life"			

| Dimensions in mm(not to scale) | -

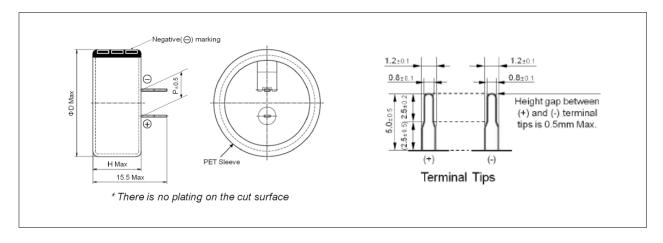

| Standard products | -

Part Number	Operating Voltage (V)	Capacitance (F)	ESR (Ω, @1kHz)	ФD×H×P (mm)
DCLT 5R5 474	5.5	0.47	≤ 50	21.5×9.5×5.0
DCLT 5R5 684		0.68	≤ 50	21.5×9.5×5.0
DCLT 5R5 105		1.0	≤ 30	21.5×9.5×5.0

Note: It is not allowed to go through reflow (IR, Atmosphere heating methods etc.) process

Homepage: http://www.bitwell.cn

Tel: 0755-25587677 Fax: 0755-25587858

E-mail: bitwell@bitwell.cn

